

FOILER WAX


is a low-cost wax-ribbon designed to work on a wide range of materials, from matt paper to some coated papers.

PHYSICAL CHARACTERISTICS

INK TYPE	WAX
TOTAL THICKNESS	7.8± 0.3 µm
SUPPORT	Polyester film
BASE FILM THICKNESS	4.5 ± 0.1 µm
COLOUR	Black
MELTING POINT	73° C

PRINTING CHARACTERISTICS

IMAGE DENSITY	≥1.8 (Macbeth)
MATERIAL TO PRINT	Paper , synthetic paper , glossy paper
USAGE CONDITIONS	5°C to 35°C, 45% to 85% relative humidity
CONSIGNMENT CONDITIONS	-5°C to 45°C, 20% to 85% relative humidity
STORAGE CONDITIONS	5°C to 40°C, 20% to 85% relative humidity

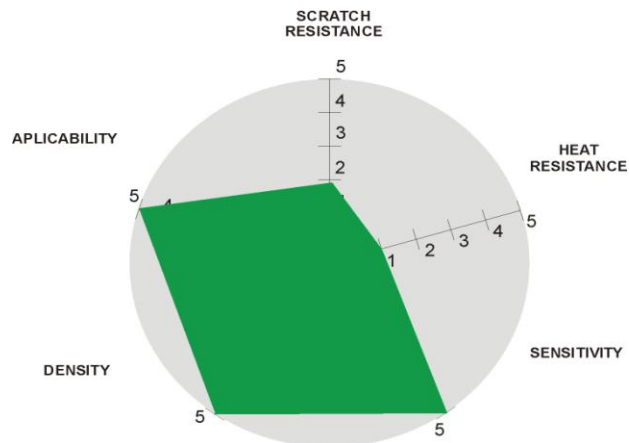

Rev. January-2012

IMPORTANT: : The information shown above is based upon test carried out by the producer of material and is believed to be reliable. Specifications are subject to change without notice